

Rate of Penetration Prediction and Optimization using Advances in Artificial Neural Networks, a Comparative Study

Khokhi Amar and Alarfaj Ibrahim

Systems Engineering Department, KFUPM, Dhahran, K.S.A.

Keywords: Prediction, Rate of Penetration, Regression, ANN, ELM, RBF.

Abstract: An important aspect of oil industry is rate of penetration (ROP) prediction. Many studies have been implemented to predict it. Mainly, multiple regression and artificial neural network models were used. In this paper, the objective is to compare the traditional multiple regression with two artificial intelligence techniques; extreme learning machines (ELM) and radial basis function networks (RBF). ELM and RBF are artificial neural network (ANNs) techniques. ANNs are cellular systems which can acquire, store, and utilize experiential knowledge. The techniques are implemented using MATLAB function codes. For ELM, the activation functions, number of hidden neurons, and number of data points in the training data set are varied to find the best combination. Different input parameters of ELM give different results. The comparison is made based on field data with no correction, then with weight on bit (WOB) correction, and finally with interpolated WOB and rotary speed (RPM) correction. Seven input parameters are used for ROP prediction. These are depth, bit weight, rotary speed, tooth wear, Reynolds number function, ECD and pore gradient. The techniques are compared in terms of training time and accuracy, and testing time and accuracy. Simulation experiments show that ELM gave the best results in terms of accuracy and processing time.

1 INTRODUCTION

Cost efficiency in oil drilling projects becomes a very important aspect nowadays. Efforts to predict effects of drilling parameters and to optimize such a cost have been widely done in many studies and reports. These studies aim to increase the performance and decrease the probability of encountering problems. In most cases, drilling cost is reduced by increasing drilling speed. This is mainly done by maximizing the rate of penetration (ROP). ROP depends on many other drilling parameters. The relationship between drilling parameters are studied to maximize ROP by finding the optimum drilling parameters (Gidh et al., 2011); (Bataee and Mohseni, 2011).

The prediction of ROP helps to select the best input parameters to get the highest drilling rate with the least cost. Thus, it has been the focus of many researcher and oil companies. Research is still going to find most accurate results. Therefore, it is important to compare between different techniques to choose the most accurate prediction.

On the other hand, the applications of

Computational Intelligence (CI) methods in petroleum engineering have recently emerged as powerful tools leading to a new generation of computer aided analysis tools for practitioners, scientists, and engineers working in several areas of petroleum industry (Khokhi, 2012); (Khokhi et al., 2011); (Khokhi and Albukhitan, 2010); (Motahhari et al., 2009); (Samuel et al., 2007). This paper presents a comparative study between the traditionally-used regression-based models with two important artificial neural network techniques on the rate of penetration prediction problem.

Currently, the available computing and modelling techniques for ROP prediction implement multiple regression models, operations research, artificial neural networks (ANN), and simulation. The parameters that affect ROP are difficult to model. Different input parameters are used in different studies. Weight on bit (WOB) and rotational speed per minute (RPM) are the main parameters that are used in most reported literature (Motahhari et al., 2009); (Samuel et al., 2007); (Bourgoyne and Young, 1974); (Eren, 2010). Unfortunately, the models in the existing studies

have some limitations. First, they did not consider all possible input parameters, which most probably result in lower accuracy of the results. Second, the data prediction speed is low (Huang et al., 2011); (Mark, 1996); (Paiaman et al., 2009); (Hamrick, 2011); (Sultan et al., 2002); (Rampersad et al., 1994); (Abtahi et al., 2011).

The scope of this paper is to compare results obtained by a multiple regression model to those obtained using extreme learning machine (ELM) and radial bases function networks (RBF) in terms of accuracy and processing speed. ELM and RBF use the concept of neural networks. The neurons learn when fed with the data. In previous ELM applications, neurons understand faster than other artificial intelligence techniques (Huang et al., 2006); (Huang, 2010); (Adrian, 1996). Carefully evaluating input parameters is crucial for the model to be fast. The output data will be compared with actual oil and gas data. Recently, a prime study showed the significant add on value of ANN to ROP prediction (Moran et al., 2010); (Awasthi and Ankur, 2008).

The main contribution of this paper as compared to the previous studies is that it investigates ELM and RBF models, which were not used before in ROP prediction. Moreover, it provides effective choices of ELM structural parameters and activation functions for a better ELM prediction. Furthermore, it shows the best of three models (ELM, RBF, regression) to help decision makers.

2 METHODOLOGY

The methodology followed is to implement each technique with different structural parameters, and activation functions, number of hidden nodes, and then compare the best results from each technique with the other techniques.

Both ELM and RBF are single hidden layer feedforward networks (SLFN). These particular techniques were chosen for several reasons. ELM and RBF usually give very good results in other fields as compared e.g. to multi-layer perceptron. Also, they are new techniques in the field of ROP prediction, which adds new information to the field. Regarding regression, it is widely used in ROP prediction. Therefore, it is important to show whether changing the common technique (regression) to a new technique is justifiable or not.

3 IMPLEMENTATION

3.1 Input / Output Data

Mainly, the methodology was implemented to provide comparable results. The same dataset is inputted to ELM and RBF. In the beginning of this work an initial published data by Bourgoyne and Young (1974) was implemented.

Seven input drilling parameters were used in the study. These are depth, bit weight, rotary speed, tooth wear, Reynolds number function, ECD and pore gradient. At a second stage, the used dataset for these inputs were those used in Eren's (2010) as to provide a fair comparison of the proposed models with the multiple regression model. The outputs from the three models are compared. The comparison is based on training time and accuracy and testing time and accuracy.

3.2 Computer Codes

Developed by Dr. Huang, a MATLAB function code is used to process data using ELM. The code was run into a loop one thousand times and then an average is taken to avoid variations due to random initializations. The parameters of ELM are changed and compared to find the best combination. The changed parameters are the number of hidden neurons, the activation function, and the stratification percentage of training data.

Regarding RBF, a MATLAB built in function (`newrb`) is used to process the data (Mathworks, 2007 a, b). The target training accuracy and percentage of training data are also changed to find the best combination.

3.3 Simulation Results

The preliminary simulation experiments are very encouraging. Each technique gave different results in terms of comparison criteria. The results are being shown for each element. For ELM, it was found that, as in Fig. 1, the time and accuracy are better when the number of hidden neurons is 5. Therefore, values around 5 were taken for the number of hidden neurons (3 to 10).

For RBF, the goal (mean square error MSE) will be taken to be either $6400 \text{ ft}^2/\text{s}^2$ or $4900 \text{ ft}^2/\text{s}^2$ which is, respectively, similar to and better than what ELM gave. Also, the spread parameter is 20,30,40,50, or 100. Table 1 shows a sample of RBF results of Accuracy and Training Time(s) vs. Spread Parameter.

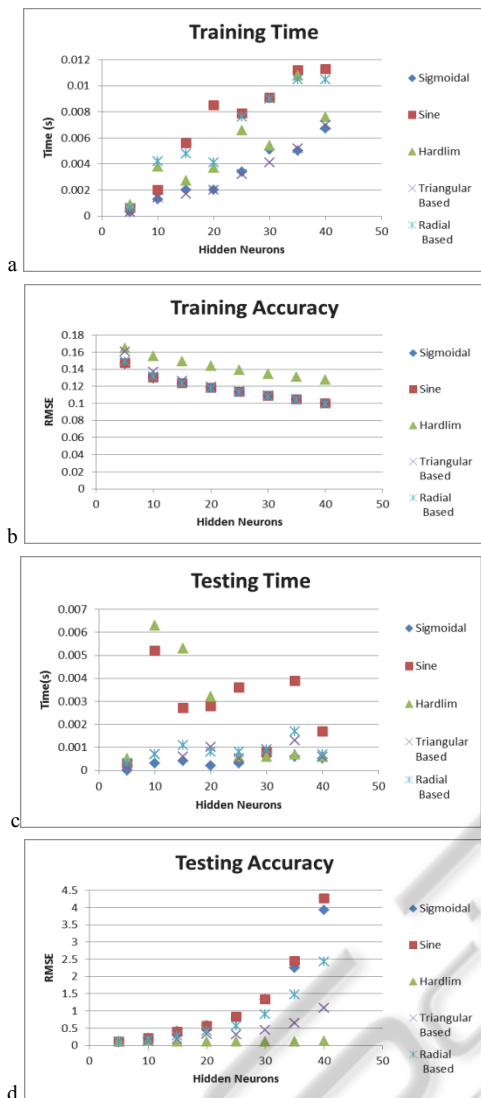


Figure 1: a) Training Time, b) training accuracy, c) testing time and d) testing accuracy, vs. No. of hidden neurons (5to50).

4 TRAINING TIME

With ELM, as shown in Fig. 2, the training time is not affected by the small changes in the number of hidden nodes. The small random variations are due to processor variability. Moreover, comparing among the different activation functions, one can see that it requires more time to train a set using triangular and radial basis function than using the other three activation functions.

RBF requires more training time than ELM does. It requires almost the same training time at the values of MSE used. Furthermore, it does not seem

to be affected by the change of the spread parameter. A sample of the results is shown in Table 1.

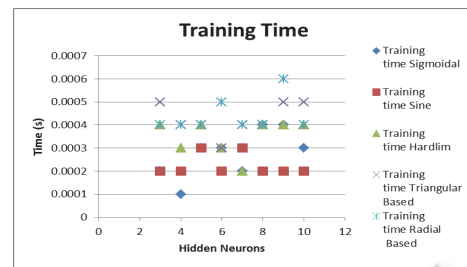


Figure 2: ELM training time.

Table 1: RBF accuracy and training time(s) vs. spread parameter.

Spread = 20	
Target training MSE	Training Time(s)
4900	0.156
6400	0.156
Spread = 40	
Target training Acc.	Training Time(s)
4900	0.1404
6400	0.156
Spread = 100	
Target training Acc.	Training Time(s)
4900	0.1248
6400	0.156

4.1 Training Accuracy

Using root mean squared error (RMSE) and standard deviation (SD), ELM gave relatively more accurate training results. The accuracy gets better with increasing hidden neurons. Hardlim function provides the least accurate results. Other functions give the very close RMSE. The results can be deduced from Fig. 3 which shows the RMSE and SD of the data in ft/hr.

RBF training accuracy is set to be either $mse=6400$ or $mse=4900 \text{ ft}^2/\text{hr}^2$. However the choice affects the time and accuracy of training and testing.

4.2 Testing Time

Testing time for ELM seems random and not affected by the number of hidden neurons. The sigmoid and sine functions gave the best results and hardlim, triangular basis, and radial basis gave the worst. Results are shown in Fig. 4.

RBF gave higher testing time than ELM. Testing Time is not affected by the choice of goal training accuracy n or the value of the spread, as shown in Table 2.

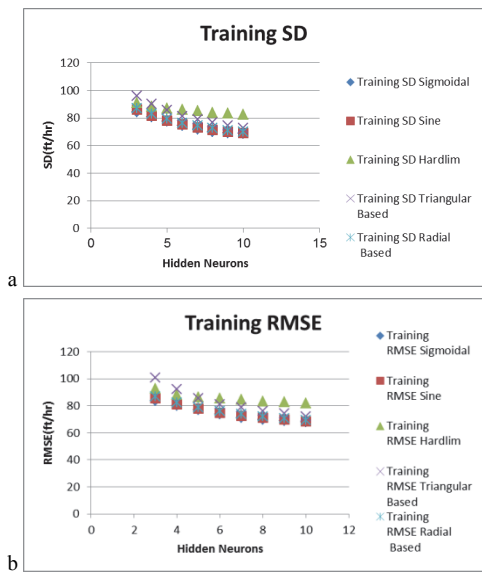


Figure 3: ELM Training Accuracy, a) RMSE, b)SD.

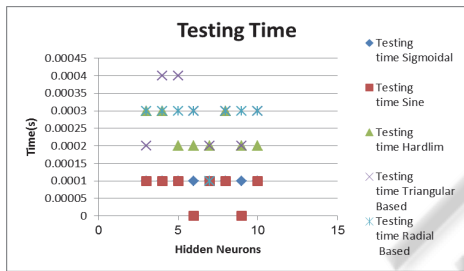


Figure 4: ELM testing time vs. No. of hidden neurons.

Table 2: RBF accuracy vs. spread parameter testing time data.

Spread = 20	
Target training Acc.	Testing Time (s)
4900	0.1092
6400	0.078

Spread = 40	
Target training Acc.	Testing Time (s)
4900	0.1092
6400	0.0936

Spread = 100	
Target training Acc.	Testing Time (s)
4900	0.1248
6400	0.0936

4.3 Testing Accuracy

ELM's testing RMSE, SD, and APRE have minima at different number of hidden nodes at each activation function. Fig. 5 displays these minima.

RBF testing was not accurate, when training

target MSE is chosen low and very good when it is chosen close to ELM's training accuracy, as can be seen in Table 3.

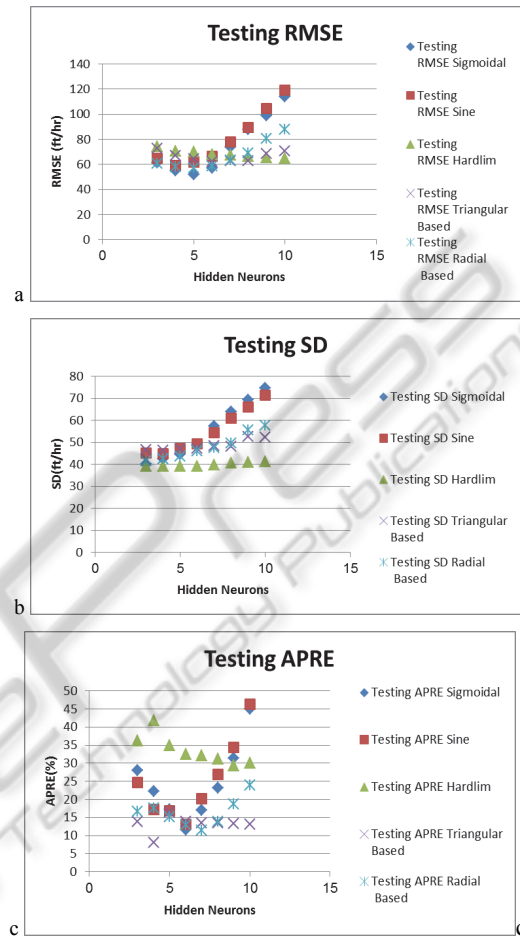


Figure 5: ELM testing accuracy.

Table 3: RBF testing accuracy.

Spread = 20			
Target training Acc.	Testing RMSE	Testing SD	Testing APRE
4900	154.8288	104.8767	82.81
6400	34.996	34.9756	9.6

Spread = 40			
Target training Acc.	Testing RMSE	Testing SD	Testing APRE
4900	129.375	89.5038	54.21
6400	35.0248	35.0017	9.63

Spread = 100			
Target training Acc.	Testing RMSE	Testing SD	Testing APRE
4900	144.3341	101.6538	70.73
6400	35.0328	35.009	9.63

4.4 Discussion

The methods' accuracies are compared in terms of RMSE, standard deviation SD, and absolute percent relative error (APRE). The regression gave for no correction, average APRE is 111%, RMSE is 210.39 ft/hr and SD is 179.89 ft/hr. For WOB correction, the average APRE is 85%, RMSE is 133.73ft/hr and SD is 107.18 ft/hr. For interpolated correction, average APRE is 30%, RMSE is 57.29 ft/hr and SD is 57.25 ft/hr. Therefore, the interpolated correction are compared with the other techniques and the data plugged in ELM and RBF models are those of the interpolated corrected.

For ELM, we see each activation function separately. From Fig. 5, it can be seen that the most accurate results are at sigmoidal with 5 hidden neurons. Table 3 shows that the most accurate method of implementing RBF is with MSE = 6400 ft²/hr² and spread = 20. Therefore, we take this combination as the candidate of comparison. Table 4 shows the comparison among the techniques in terms of testing accuracies.

Comparing the results above, we can see that RBF is the most accurate technique. However, ELM is the fastest. Therefore, depending on the objective, a decision can be made.

Table 4: Comparison of testing accuracies.

technique criterion	ELM	RBF	Regression
RMSE(ft/hr)	51.9716	34.996	37.36152
SD(ft/hr)	44.405	34.9756	64.71206
APRE	17.13%	9.6%	33%

5 CONCLUSIONS

This paper has shown a comparison among ELM, RBF, and a multiple regression model for ROP Prediction. The professionals and decision makers are advised, according to the results of this study, to choose RBF as the ROP prediction technique. However, if processing speed is more important, the decision makers might want to use ELM. Additional ANN techniques can be used in development of this study. Some of them are being implemented in an ongoing work.

ACKNOWLEDGEMENTS

The authors would like to thank KACST for

supporting this work under grant: KACST-OIL-AR-30-258-2012, and Dr. Tuna Eren, for providing real time data and regression models. Mr. Alarfaj gives special thanks to KFUPM and Systems Engineering Department for offering the SE 439 course on undergraduate research.

REFERENCES

- Abtahi A., Butt S., and Molgaard, J., and Arvani F., 2011. "Bit Wear Analysis and Optimization for Vibration Assisted Rotary Drilling) VARD (using Impregnated Diamond Bits)", Memorial University of Newfoundland, St. John's, NL, Canada.
- Adrian G. Bors 1996. "Introduction to the Radial Basis Function (RBF) Networks", University of York. Available: www.sers.cs.york.ac.uk/adrian/Papers/Others/OSEE01.pdf.
- Awasthi, Ankur 2008. "Intelligent oilfield operations with application to drilling and production of hydrocarbon wells", University of Houston, 2008, 370p.
- Bataee M., & Mohseni, S., 2011. "Application of artificial intelligent systems in ROP optimization: A case study in Shadegan oil field". *SPE Middle East Unconventional Gas Conference and Exhibition* 2011.
- Bourgoyne A.T. Jr., Young F.S., 1974 "A Multiple Regression Approach to Optimal Drilling and Abnormal Pressure Detection", *SPE 4238*, August 1974. Available: <http://www.onepetro.org/mslib/servlet/onepetroreview?id=00004238>.
- Eren Tuna, 2010. "Real-Time-Optimization Of Drilling Parameters During Drilling Operations Dissertation" PhD *Technical University of the Middle East, Turkey*. "Getting Started with Matlab 7" www.mathworks.com (2007).
- Gidh Yashodhan, Ibrahim Hani, Purwanto Arifin, and Bits smith, 2011. "Real-time drilling parameter optimization system increases ROP by predicting/managing bit wear". *SPE Digital Energy conference and Exhibition*, 2011.
- Hamrick, Todd Robert, 2011. "Optimization of Operating Parameters for Minimum Mechanical Specific Energy in Drilling", *West Virginia University*, 148 p.
- Huang, Guang-Bin, Wang, Dian Hui, and Lan, Yuan, 2011. "Extreme learning machines: a survey", *Int. J. Mach. Learn. & Cyber.* (2011) 2:107–122.
- Huang, Guang-Bin, 2010. "Extreme Learning Machine: Learning Without Iterative Tuning", Available: <http://www.extreme-learning-machines.org/>.
- Huang, Guang-Bin, Zhu, Qin-Yu, Siew, Chee-Kheong, 2006. "Extreme learning machine: Theory and applications", *ScienceDirect*. <http://www.mathworks.com/help/toolbox/nnet/ref/newrb.html>.
- Khoukhi A., 2012. "Hybrid soft computing systems for reservoir PVT properties prediction", *Computers and Geosciences*, Elsevier, vol. 44, p: 109–119 2012.

- Khoukhi A., Oloso M., Abdulraheem A., El-Shafei M., Al-Majed A., 2011. "Support Vector Machines and Functional Networks for Viscosity and Gas/oil Ratio Curves Prediction", *Int'l Journal of Computational Intelligence and Applications* vol. 10, No. 3, Oct 2011, pp: 269–293.
- Khoukhi A., Albukhitan S., 2010. "A Data Driven Genetic Neuro Fuzzy System to PVT Properties Prediction", *NAFIPS10*, Toronto, Canada. 12-14 July 2010.
- Mark J. L. Orr 1996. "Introduction to Radial Basis Function Network", Center of Cognitive Science, University of Edinburg, April, 1996. Available: <http://www.anc.ed.ac.uk/rbf/intro/intro.html>.
- Moran David, Ibrahim Hani, Purwanto Arifin, Smith International and Jerry Osmond, 2010. "Sophisticated ROP Prediction Technologies Based on Neural Networks Delivers Accurate Drill Time Result", *SPE Asia Pacific Drilling Technology Conference and Exhibition*, 2010.
- Motahhari H.R., Hareland G., Nyqaard R., and Bond B., 2009. "Method of optimizing motor and bit performance for maximum ROP", *Journal of Canadian Petroleum Technology*, 2009.
- Paiaman A. M., Al-Askari M. K. Ghassem, Salmani B, Al-Anazi, B. D. and Masihi M. 2009. "Effect of Drilling Fluid Properties on Rate of Penetration", *NAFTA 60* (3) 129-134 (2009).
- Rampersad, P.R., Hareland, G.; and Boonyapaluk, P., 1994. "Drilling Optimization Using Drilling Data and Available Technology", *SPE Latin America/Caribbean Petroleum Engineering Conference*, 27-29 April 1994, Buenos Aires, Argentina.
- Samuel G., Robello, Azar, Jamal J., 2007. "Drilling Engineering", PennWell Books, 486p.
- Sultan, Mir Asif, Al-Kaabi, Abdulaziz U, 2002. "Application of Neural Network to the Determination of Well-Test Interpretation Model for Horizontal Wells", *SPE Asia Pacific Oil and Gas Conference and Exhibition*, 8-10 October 2002, Melbourne, Australia.

