

A TWO-DIMENSIONAL INVERSE HEAT CONDUCTION PROBLEM FOR ESTIMATING HEAT SOURCE

A. SHIDFAR, A. ZAKERI, AND A. NEISI

Received 28 May 2002 and in revised form 9 May 2005

This note considers the problem of estimating unknown time-varying strength of the temporal-dependent heat source, from measurements of the temperature inside the square domain, when the prior knowledge of the source functions is not available. This problem is an inverse heat conduction problem. In this process, the direct problem will be solved by using the heat fundamental solution. Then a sequential algorithm is developed to solve a Volterra integral equation, which has been produced by using unknown source term and overposed data conditions. This algorithm is based on the piecewise linear continuous functions. The performance of the present technique of inverse analysis is evaluated, by means of several numerical experiments, and is found to be very accurate as well as efficient.

1. Introduction

An inverse heat conduction problem is concerned with the determination of the unknown source term, from the knowledge of directly measurable quantities such as temperature inside the domain. Obviously, the solution of these inverse problems is not straightforward due to their ill-posedness, and it requires special numerical techniques to stabilize the result of calculations [1, 8, 9, 10, 11].

For this purpose, the least-squares method will be modified by the addition of regularization terms that impose additional restrictions on admissible solutions. This idea has been provided by Özisik, Orlande, Park, Chung, and Jung in [5, 6, 12]. In [5, 7], a sequential algorithm where initial a priori estimation is continuously updated based on the current experimental measurements is used. In this process, the triangular shape functions with the Karhunen-Loève decomposition method has been applied. The sensitivity and adjoint problems are described in [5, 12].

We use the heat fundamental solution for direct problem, and then by choosing the strength of the form of a finite series of shape functions with unknown constant coefficient and applying a linear least-squares method, the term heat source will be estimated. A numerical experiment is given in the final section of this note.

2. Mathematical formulation

Let $D = \{(x, y) | 0 < x < L, 0 < y < L\}$ be a square domain in \mathbb{R}^2 . To illustrate the methodology for determining unknown location and strength of a heat source by the sequential and Tikhonov regularization methods, the governing equation for the heat condition induced by a time-varying heat source, $g(t)$ located at $(x^*, y^*) \in D$ in the square D , the Neuman boundary conditions, and a temperature distribution at zero time are in the form

$$\rho c \partial_t T(x, y, t) = k \nabla^2 T(x, y, t) + g(t) \delta(x - x^*, y - y^*), \quad (x, y) \in D, 0 < t < t_f, \quad (2.1)$$

$$T(x, y, 0) = T_0(x, y), \quad (x, y) \in D \cup \partial D, \quad (2.2)$$

$$\partial_x T(0, y, t) = 0, \quad 0 \leq y \leq L, 0 \leq t \leq t_f, \quad (2.3)$$

$$\partial_x T(L, y, t) = P(y, t), \quad 0 \leq y \leq L, 0 \leq t \leq t_f, \quad (2.4)$$

$$\partial_y T(x, 0, t) = 0, \quad 0 \leq x \leq L, 0 \leq t \leq t_f, \quad (2.5)$$

$$\partial_y T(x, L, t) = Q(x, t), \quad 0 \leq x \leq L, 0 \leq t \leq t_f, \quad (2.6)$$

where $\delta(\cdot)$ is the Dirac delta function, t_f , k , ρ , and c are constant numbers, and are called final time, thermal conductivity, density, and specific heat of the material, respectively. We will assume through out the note that P , Q , and T_0 are piecewise continuous functions.

By putting

$$T(x, y, t) = u(x, y, t) + v(x, y, t), \quad (2.7)$$

then, the problem (2.1)–(2.6) may be converted to

$$\begin{aligned} \rho c \partial_t u(x, y, t) &= k \nabla^2 u(x, y, t), \quad (x, y) \in D, 0 < t < t_f, \\ u(x, y, 0) &= T_0(x, y), \quad (x, y) \in D \cup \partial D, \\ \partial_x u(0, y, t) &= 0, \quad 0 \leq y \leq L, 0 \leq t \leq t_f, \\ \partial_x u(L, y, t) &= P(y, t), \quad 0 \leq y \leq L, 0 \leq t \leq t_f, \end{aligned} \quad (2.8)$$

$$\partial_y u(x, 0, t) = 0, \quad 0 \leq x \leq L, 0 \leq t \leq t_f,$$

$$\partial_y u(x, L, t) = Q(x, t), \quad 0 \leq x \leq L, 0 \leq t \leq t_f,$$

$$\begin{aligned} \rho c \partial_t v(x, y, t) &= k \nabla^2 v(x, y, t) + g(t) \delta(x - x^*, y - y^*), \quad (x, y) \in D, 0 < t < t_f, \\ v(x, y, 0) &= 0, \quad (x, y) \in D \cup \partial D, \end{aligned} \quad (2.9)$$

$$\partial_{\bar{n}} v(x, y, t) = 0, \quad (x, y) \in \partial D, 0 \leq t \leq t_f,$$

where $\bar{\mathbf{n}}$ is the direction of the inner normal to the ∂D .

Obviously, the problem (2.8) is a direct problem, it has a unique solution in the form [2]

$$\begin{aligned}
 u(x, y, t) = & \int \int_D N(x, \xi, y, \eta, t) T_0(\xi, \eta) d\xi d\eta \\
 & + 2 \int_0^L \int_0^t \theta(x - L, y - \eta, t - \tau) P(\eta, \tau) d\tau d\eta \\
 & + 2 \int_0^L \int_0^t \theta(x - \xi, y - L, t - \tau) Q(\eta, \tau) d\tau d\xi,
 \end{aligned}
 \tag{2.10}$$

where

$$\begin{aligned}
 N(x, \xi, y, \eta, t) = & \theta(x - \xi, y - \eta, t) + \theta(x + \xi, y + \eta, t), \\
 \theta(x, y, t) = & \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} K(x + 2m, y + 2n, t)
 \end{aligned}
 \tag{2.11}$$

is the θ -function in two-dimensional space and

$$K(x, y, t) = \frac{k}{4\pi\rho ct} \exp \left\{ \frac{-k(x^2 + y^2)}{4\rho ct} \right\}
 \tag{2.12}$$

that may be derived from

$$K(x, t) = \frac{1}{\sqrt{4\pi t}} \exp \left(\frac{-x^2}{4t} \right),
 \tag{2.13}$$

the fundamental solution of the one-dimensional heat equation.

Now, if $g(t)$ is a known bounded function in $L^2(0, t_f)$, then the problem (2.9) is a direct heat conduction problem. The unique solution of this problem may be represented by

$$\begin{aligned}
 v(x, y, t) = & \int_0^L \int_0^L \int_0^t N(x, \xi, y, \eta, t - \tau) g(\tau) \delta(\xi - x^*, \eta - y^*) d\tau d\xi d\eta \\
 = & \int_0^t N(x, x^*, y, y^*, t - \tau) g(\tau) d\tau.
 \end{aligned}
 \tag{2.14}$$

Now, if (2.1)–(2.6) is a problem with a known source term and unknown time-dependent strength $g(t)$, then it is an inverse problem. For finding an unknown function $g(t)$ in (2.14), we use the overposed data condition in the form

$$T(x_1, y_1, t) = Y(t), \quad 0 \leq t \leq t_f,
 \tag{2.15}$$

where $(x_1, y_1) \neq (x^*, y^*)$ is an interior point of D . Now, by substituting (2.15) into (2.7)

and using (2.10) and (2.14), we derive a Volterra integral equation in the form

$$f(t) = Y(t) - u(x_1, y_1, t) = \int_0^t N(x_1, x^*, y_1, y^*, t - \tau)g(\tau)d\tau, \quad 0 \leq t \leq t_f. \quad (2.16)$$

If $g(t) \in L^2(0, t_f)$, then the problem (2.16) has unique solution [2].

Because problem (2.16) is an ill-posed problem, the regularization method must be utilized in order to obtain a useful approximation to the desired solution.

In the next section, the sequential algorithm with triangular shape functions will be used for estimating the solution of (2.16). In this algorithm, the shape functions are used.

3. Numerical scheme

In this section, we suppose that $g(t)$ in the problem (2.1)–(2.6) is an unknown function. Then, the unknown function $g(t)$ will be estimated by using the temperature histories taken at $(x_1, y_1) \in D$ over the interval of time $[0, t_f]$. For this purpose, we employ a numerical method to solve the first-kind Volterra integral equation (2.16), with convolution kernel N , on $[0, t_f]$.

Let $M = 1, 2, \dots$ be an arbitrary integer constant number, $\Delta t = t_f/M$, and $t_i = i\Delta t$ for any $i = 0, \dots, M$. Then the approximate solution $g^*(t)$ is chosen in the form

$$g^*(t) = \sum_{m=1}^M g_m^* \Phi_m(t), \quad (3.1)$$

where $\Phi_m(t)$ is the m th base function defined by

$$\Phi_m(t) = \begin{cases} \frac{t - t_{m-1}}{t_m - t_{m-1}}, & t_{m-1} \leq t \leq t_m, \\ \frac{t_{m+1} - t}{t_{m+1} - t_m}, & t_m \leq t \leq t_{m+1}, \\ 0 & \text{elsewhere.} \end{cases} \quad (3.2)$$

We note that $\{\Phi_m(t)\}_{m=1}^M$ is the orthonormal set in $C[0, t_f]$. The goal of this section is to show that the approximate vector $\mathbf{g}^* = (g_1^*, \dots, g_M^*)^T$ defined by the discrete sequential Tikhonov regularization algorithm is a suitable approximation for $\mathbf{f} = (f(t_1), \dots, f(t_M))^T$ for appropriate choices of $t_1, \dots, t_M \in [0, t_f]$, and $M \in \mathbb{N}$, instead of $\mathbf{g} = (g_1, \dots, g_M)^T$. Such parameter estimation problem is solved by the minimization of the ordinary least-squares method.

By putting (3.1) in (2.16), at successive time $t = t_i, i = 1, \dots, M$, we obtain

$$\begin{aligned} f(t_1) &= \sum_{m=1}^M g_m^* \int_0^{t_1} N(x_1, x^*, y_1, y^*, t_1 - \tau)\phi_m(\tau)d\tau \\ &= g_1^* \int_0^{t_1} N(x_1, x^*, y_1, y^*, t_1 - \tau)\phi_1(\tau)d\tau, \end{aligned} \quad (3.3)$$

$$\begin{aligned}
 f(t_i) &= \sum_{m=1}^M g_m^* \int_0^{t_i} N(x_1, x^*, y_1, y^*, t_i - \tau) \phi_m(\tau) d\tau \\
 &= \sum_{m=1}^{i-1} g_m^* \int_{t_{m-1}}^{t_{m+1}} N(x_1, x^*, y_1, y^*, t_i - \tau) \phi_m(\tau) d\tau \\
 &\quad + g_i^* \int_{t_{i-1}}^{t_i} N(x_1, x^*, y_1, y^*, t_i - \tau) \phi_i(\tau) d\tau \\
 &= \sum_{m=1}^{i-1} g_m^* \int_0^{t_2} N(x_1, x^*, y_1, y^*, t_{i-m+1} - \tau) \phi_1(\tau) d\tau \\
 &\quad + g_i^* \int_0^{t_1} N(x_1, x^*, y_1, y^*, t_1 - \tau) \phi_1(\tau) d\tau \\
 &= \sum_{m=1}^{i-1} g_m^* a_{i-m+1} + g_i^* a_1, \quad i = 2, \dots, M,
 \end{aligned} \tag{3.4}$$

where

$$a_1 = \int_0^{t_1} N(x_1, x^*, y_1, y^*, t_1 - \tau) \phi_1(\tau) d\tau, \tag{3.5}$$

$$a_i = \int_0^{t_2} N(x_1, x^*, y_1, y^*, t_i - \tau) \phi_1(\tau) d\tau, \quad i = 2, \dots, M. \tag{3.6}$$

Now, consider the system of equations

$$\mathbf{A} \mathbf{g}^* = \mathbf{f}, \tag{3.7}$$

which is obtained by (3.1)–(3.6), such that $\mathbf{A} \in \mathbb{R}^{M \times M}$ is a lower-triangular Toeplitz matrix given by

$$\mathbf{A} = \begin{pmatrix} a_1 & 0 & \cdots & 0 \\ a_2 & a_1 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ a_M & a_{M-1} & \cdots & a_1 \end{pmatrix}, \tag{3.8}$$

and that $a_i > 0$, for all i .

Therefore, we can drive a convergence and stable solution to (3.7) by the fast algorithm for the implementation of sequential Tikhonov regularization method described by Lamm and Eldén in [3, 4].

In order to find the solution of the system equations (3.7), we define

$$J(\mathbf{g}^*) = \sum_{m=1}^M \left\{ \left(\sum_{i=1}^m (a_{m-i+1} g_i^* - f_i) \right)^2 + \alpha \left(\sum_{i=1}^m \ell_{m-i+1} g_i^* \right)^2 \right\}, \tag{3.9}$$

where $\alpha > 0$ is a given regularization parameter and

$$\mathbf{L} = \begin{pmatrix} \ell_1 & 0 & \cdots & 0 \\ \ell_2 & \ell_1 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ \ell_M & \ell_{M-1} & \cdots & \ell_1 \end{pmatrix} \tag{3.10}$$

is a lower-triangular Toeplitz matrix instead of \mathbf{I} in the sequential Tikhonov regularization algorithm. In the end of this section, the effective choice of \mathbf{L} will be expressed. The least-squares procedure for the estimation of \mathbf{g}^* applies for the minimization of $J(\mathbf{g}^*)$ in (3.9). $J(\mathbf{g}^*)$ will be minimized by differentiating with respect to unknown parameter g_j^* for any $j = 1, \dots, M$, and then setting the resulting expression equal to zero. Consequently by using [4], we can obtain the unknown vector \mathbf{g}^* as in the following process. Assuming that g_1^*, \dots, g_{i-1}^* have already been found, then by putting

$$\begin{aligned} \mathbf{h}^{(1)} &= (f_1, \dots, f_r), \\ \mathbf{h}^{(i)} &= (h_1^{(i)}, \dots, h_r^{(i)}), \quad i \geq 2, \end{aligned} \tag{3.11}$$

with

$$h_p^{(i)} = f_{i+p-1} - \sum_{j=1}^{i-1} a_{i+p-j} g_j^*, \quad p = 1, \dots, r < M, \tag{3.12}$$

we determine g_i^* by finding the vector $\beta = (\beta_1, \dots, \beta_r)$ from the minimization of $J(\beta)$ in the form

$$J(\beta) = \sum_{m=1}^r \left\{ \left(\sum_{k=1}^m (a_{m-k+1} \beta_k - f_k) \right)^2 + \alpha \left(\sum_{k=1}^m \ell_{m-k+1} \beta_k \right)^2 \right\}. \tag{3.13}$$

Substituting \mathbf{g}^* in (3.1), $g(t)$ will be approximated for $0 < t \leq t_f$.

Finally, in this section by using [3, 4], we express the following theorems for convergence and stability of the above procedure.

THEOREM 3.1. *Assume that $r = 1, 2, \dots$ is a fixed integer and let $g \in C[0, t_f]$, where g is the solution of (2.16) on $[0, t_f]$ using precise data f . In addition, assume that for $\delta > 0$, the perturbed data $f^\delta(t)$ satisfies in $f^\delta(t) = f(t) + d(t)$, $t \in [0, t_f]$, with $|d(t)| < \delta$ on $t \in [0, t_f]$. Then if $\alpha = \alpha(t)$ is selected such that $\alpha = \hat{\alpha} \Delta t^2$ with $\hat{\alpha} > 0$ and $\Delta t = \Delta t(\delta)$ satisfies $\Delta t(\delta) = \tau \sqrt{\delta}$ with a constant number $\tau > 0$, it follows that as $\delta \rightarrow 0$, $\Delta t(\delta) \rightarrow 0$, $\alpha(\Delta t) \rightarrow 0$, and*

$$|g_J - g(t_J)| \leq \delta^{1/2} \bar{C}(r) + \mathcal{O}(\delta) \rightarrow 0, \quad \text{for } J = 1, \dots, M(\delta), \tag{3.14}$$

Table 4.1. Overposed exact matching data for u in t_i and location $(0.25, 0.25)$.

$t_i = i\Delta t$	0.1	0.2	0.3	0.4	0.5
$u(0.25, 0.25, t_i)$	1.01701	1.05651	1.11255	1.18574	1.27727
$t_i = i\Delta t$	0.6	0.7	0.8	0.9	1
$u(0.25, 0.25, t_i)$	1.37792	1.47816	1.57825	1.67828	1.77829

as $\delta \rightarrow 0$, where $\bar{C}(r)$ is a fixed positive constant and $\mathbf{g} = (g_1, \dots, g_M)^\top$ is the solution of the problem (3.3)–(3.4) based on using perturbed data $f^\delta(t)$.

Proof. The proof of this theorem is given by Lamm and Eldén in [3, 4], when the solution of the sequential Tikhonov regularization problem for approximations based on piecewise constant functions, rectangular quadrature, or midpoint quadrature. By using the mean-value theorem for integrals in (3.3) and (3.4) in the form

$$\begin{aligned}
 a_1 &= \int_0^{t_1} N(x_1, x^*, y_1, y^*, t_1 - \tau) \phi_1(\tau) d\tau \\
 &= \phi_1(\zeta) \int_0^{t_1} N(x_1, x^*, y_1, y^*, t_1 - \tau) d\tau, \quad \text{for } 0 < \zeta < t_1, \\
 a_i &= \int_0^{t_2} N(x_1, x^*, y_1, y^*, t_i - \tau) \phi_1(\tau) d\tau \\
 &= \phi_1(\varrho) \int_0^{t_2} N(x_1, x^*, y_1, y^*, t_i - \tau) d\tau, \quad \text{for } 0 < \varrho < t_2, \quad i = 2, \dots, M,
 \end{aligned}
 \tag{3.15}$$

and applying the similar method to the processes of their prove, the proof of the above theorem is investigated. □

In the next section, a numerical sample is given and the performance of the present technique of inverse analysis is evaluated.

4. Numerical example

For the inverse problem (2.1)–(2.6), we use the inverse technique for (2.1) defined on the square $D = \{(x, y) \mid 0 < x < 1, 0 < y < 1\}$, $0 < t \leq 1$, and $k = \rho = c = 1$ in following example.

Example 4.1. Consider the inverse heat conduction problem

$$\begin{aligned}
 \partial_t T(x, y, t) &= \nabla^2 T(x, y, t) + g(t) \delta(x - 0.5, y - 0.5), \quad (x, y) \in D, \quad 0 < t < 1, \\
 T(x, y, 0) &= 1, \quad (x, y) \in D \cup \partial D, \\
 \partial_{\bar{n}} T(x, y, t) &= 0, \quad (x, y) \in \partial D, \quad 0 \leq t \leq 1.
 \end{aligned}
 \tag{4.1}$$

The overposed exact matching data has been evaluated in discrete time with time step $\Delta t = 0.1$ and location at $(0.25, 0.25)$. These values are given in Table 4.1.

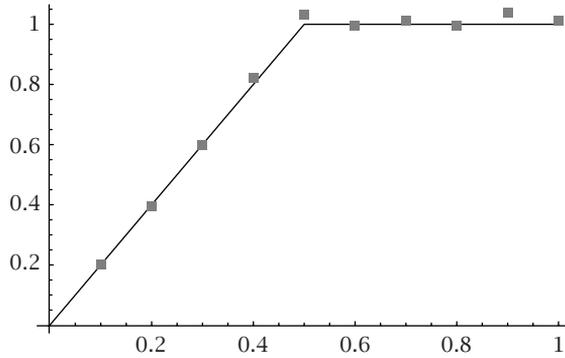


Figure 4.1. Exact and estimated solution for $g(t)$.

The exact solution functions $u(x, y, t)$ and $g(t)$ are in the form

$$\begin{aligned}
 u(x, y, t) = & \sum_{m=1}^{\infty} 2 \cos(0.5m\pi) \cos(m\pi x) \int_0^t g(\tau) \exp(-m^2\pi^2(t-\tau)) d\tau \\
 & + \sum_{n=1}^{\infty} 2 \cos(0.5m\pi) \cos(n\pi y) \int_0^t g(\tau) \exp(-n^2\pi^2(t-\tau)) d\tau \\
 & + \sum_{m=1}^{\infty} \sum_{n=1}^{\infty} \left\{ 4 \cos(0.5m\pi) \cos(0.5n\pi) \cos(m\pi x) \cos(n\pi y) \right. \\
 & \quad \times \int_0^t \exp\{-(m^2+n^2)\pi^2(t-\tau)\} g(\tau) d\tau \left. \right\} + \int_0^t g(\tau) d\tau + 1, \tag{4.2}
 \end{aligned}$$

$$g(t) = \begin{cases} 2t, & 0 \leq t \leq 0.5, \\ 1, & 0.5 \leq t \leq 1. \end{cases}$$

An approximate solution function $g(t)$ has been derived in the discrete time by solving the integral equation (2.16) by the sequential Tikhonov regularization algorithm based on triangular functions in (3.1). In this process, we assumed that $\alpha = 10^{-3}$ and \mathbf{L} is the identity matrix \mathbf{I} . The exact and approximate solution function $g(t)$ with Figure 4.1 follows.

References

- [1] G. Alessandrini and V. Isakov, *Analyticity and uniqueness for the inverse conductivity problem*, Rend. Istit. Mat. Univ. Trieste **28** (1996), no. 1-2, 351–369.
- [2] J. R. Cannon, *The One-Dimensional Heat Equation*, Encyclopedia of Mathematics and Its Applications, vol. 23, Addison-Wesley, Massachusetts, 1984.
- [3] L. Eldén, *An efficient algorithm for the regularization of ill-conditioned least squares problems with triangular Toeplitz matrix*, SIAM J. Sci. Statist. Comput. **5** (1984), no. 1, 229–236.
- [4] P. K. Lamm and L. Eldén, *Numerical solution of first-kind Volterra equations by sequential Tikhonov regularization*, SIAM J. Numer. Anal. **34** (1997), no. 4, 1432–1450.

- [5] M. N. Özisik and H. R. B. Orlande, *Inverse Heat Transfer, Fundamentals and Applications*, Taylor and Francis, New York, 2000.
- [6] H. M. Park and O. Y. Chung, *An inverse natural convection problem of estimating the strength of a heat source*, *Int. J. Heat Mass Transfer* **42** (1999), no. 23, 4259–4273.
- [7] H. M. Park and W. S. Jung, *A recursive algorithm for multidimensional inverse heat conduction problems by means of mode reduction*, *Chem. Eng. Sci.* **55** (2000), no. 21, 5115–5124.
- [8] A. Shidfar and R. Pourgholi, *Application of finite difference method to analysis an ill-posed problem*, to appear in *Appl. Math. Comput.*
- [9] A. Shidfar and A. Zakeri, *Asymptotic solution for an inverse parabolic problem*, *Math. Balkanica (N.S.)* **18** (2004), no. 3-4, 475–483.
- [10] ———, *A numerical technique for backward inverse heat conduction problems in one dimensional space*, to appear in *Appl. Math. Comput.*
- [11] A. N. Tikhonov and V. Y. Arsenin, *Solutions of Ill-Posed Problems*, Scripta Series in Mathematics, V. H. Winston & Sons, District of Columbia, 1977.
- [12] C.-Y. Yang, *Solving the two-dimensional inverse heat source problem through the linear least-squares error method*, *Int. J. Heat Mass Transfer* **41** (1998), no. 2, 393–398.

A. Shidfar: Department of Mathematics, Iran University of Science and Technology, Narmak, Tehran 16844, Iran

E-mail address: shidfar@iust.ac.ir

A. Zakeri: Department of Mathematics, Iran University of Science and Technology, Narmak, Tehran 16844, Iran

E-mail address: a_zakeri@iust.ac.ir

A. Neisi: Department of Statistics, Faculty of Economics, Allameh Tabatabaie University, Dr. Beheshti Avenue, Tehran 15136-15411, Iran

E-mail address: neisi@iust.ac.ir

Special Issue on Modeling Experimental Nonlinear Dynamics and Chaotic Scenarios

Call for Papers

Thinking about nonlinearity in engineering areas, up to the 70s, was focused on intentionally built nonlinear parts in order to improve the operational characteristics of a device or system. Keying, saturation, hysteretic phenomena, and dead zones were added to existing devices increasing their behavior diversity and precision. In this context, an intrinsic nonlinearity was treated just as a linear approximation, around equilibrium points.

Inspired on the rediscovering of the richness of nonlinear and chaotic phenomena, engineers started using analytical tools from "Qualitative Theory of Differential Equations," allowing more precise analysis and synthesis, in order to produce new vital products and services. Bifurcation theory, dynamical systems and chaos started to be part of the mandatory set of tools for design engineers.

This proposed special edition of the *Mathematical Problems in Engineering* aims to provide a picture of the importance of the bifurcation theory, relating it with nonlinear and chaotic dynamics for natural and engineered systems. Ideas of how this dynamics can be captured through precisely tailored real and numerical experiments and understanding by the combination of specific tools that associate dynamical system theory and geometric tools in a very clever, sophisticated, and at the same time simple and unique analytical environment are the subject of this issue, allowing new methods to design high-precision devices and equipment.

Authors should follow the Mathematical Problems in Engineering manuscript format described at <http://www.hindawi.com/journals/mpe/>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/> according to the following timetable:

Manuscript Due	December 1, 2008
First Round of Reviews	March 1, 2009
Publication Date	June 1, 2009

Guest Editors

José Roberto Castilho Piqueira, Telecommunication and Control Engineering Department, Polytechnic School, The University of São Paulo, 05508-970 São Paulo, Brazil; piqueira@lac.usp.br

Elbert E. Neher Macau, Laboratório Associado de Matemática Aplicada e Computação (LAC), Instituto Nacional de Pesquisas Espaciais (INPE), São José dos Campos, 12227-010 São Paulo, Brazil ; elbert@lac.inpe.br

Celso Grebogi, Center for Applied Dynamics Research, King's College, University of Aberdeen, Aberdeen AB24 3UE, UK; grebogi@abdn.ac.uk